

Quick Setup Guide

Model: QN-I-490

www.qntmnet.com

Copyright Information

The copyright and trademark specifications mentioned in this document are subject to change without prior notice. All the content, including the Quantum Networks[®] logo, is the property of Zen Exim Pvt. Ltd. Other brands or products mentioned in this document may be trademarks or registered trademarks of their respective owners. It is strictly prohibited to use, translate or transmit the contents of this document in any form or by any means without obtaining prior written permission from Zen Exim Pvt. Ltd.

Contents

Glossary	4
Icon description	4
Before you begin	5
Package contents	5
Prerequisites	5
Network requisites	5
Connect Access Point	5
Step 1 – Create new account on Quantum Rudder	6
Step 2 - Basic setup	7
Step 3 - Setting up device IP address	8
Step 4 – Set the management mode	9
Step 5 - Access Point quick setup in Rudder Mode	10
Step 6 - Access Point quick setup in standalone mode	15
Reset Access Point to factory defaults	18
Access Point default login detail	18

This Quick Setup Guide provides step-by-step instructions on how to set up Quantum Networks Access Point. After completing the steps described in this Guide, you will be able to install the Access Point (AP) on-site and provide wireless network access to users.

Glossary

Feature	Description	
Management Mode	Standalone: In this mode, each device is configured and	
	managed individually. It can be useful in scenarios with few	
	devices or sites with limited Internet access and basic features.	
	Cloud: In this mode, devices are configured and managed	
	from a central controller hosted in the cloud. It offers many	
	more sets of features as compared to the Standalone mode.	
Operation Mode	Bridge: In this mode, the device connects to a network over	
	an ethernet cable and extends the coverage over wireless.	
	Router: In this mode, the device connects to Internet Service	
	Provider directly using DHCP / Static IP / PPPoE protocols	
	and shares Internet access over a wired or wireless network to	
	users.	
Quantum Rudder	Quantum Rudder is a cloud-hosted controller which can be	
	used to configure, manage & monitor devices associated with	
	it. It can be accessed from <u>https://rudder.qntmnet.com</u>	

Icon description

Icon on GUI	Description
0	Click to get the option for the firmware update.
*	Click to get back to the home page.
0	Click to check the documentation.
(î;	Click to check device information.

Your Quantum Networks Access Point can work in **"Standalone Mode"** or can be managed by **"Rudder"**.

Package contents

- Access Point.
- Mounting kit

Prerequisites

- Internet access.
- Desktop / Laptop / Handheld device.
- 802.3af / 802.3at PoE Switch / PoE Injector.
- 12V, 2A DC power adapter.

Network requisites

The listed ports must be opened or allowed in the network firewall.

- TCP: 80, 443, 2232, 1883.
- UDP: 123, 1812, 1813.
- Allow rudder.qntmnet.com and reports.qntmnet.com in the destination field.

Connect Access Point

- After unpacking Access Point, connect it to an Internet source.
- Plug-in Ethernet cable of Access Point.
- Power on Access Point by using 802.3af / 802.3at PoE Switch / PoE Injector.

Note: Access Point must have Internet access during initial setup for the first time to activate the device, warranty and support.

Step 1 – Create new account on Quantum Rudder

- Browse <u>https://rudder.qntmnet.com</u>.
- Click "Create New Account" to sign up for a new account.


	DER Services Controller	®
	🔒 Sign up	
Administrator	First Name	Last Name
Email	Email	
Phone	= • phone	
Country	India	~
Timezone	Asia/Kolkata(GMT4	5:30)
Password		0
Confirm Password	Confirm Password	0
	Register	
		Logi

Figure 1

- Follow the steps as guided on the screen for Registration.
- Verify Quantum Rudder account from registered email id. (you will get)
- Once the account gets validated, it turns the page to "Add License Key" (User will get the license key from respective (Partner / Resource))
- Account on Quantum Rudder (Quantum Networks Cloud Controller) is now ready to use.

Step 2 - Basic setup

- Connect the WAN port of the Access Point to the network with Internet access.
- You should see a new wireless network with SSID QN_XX:XX (where XX:XX are the last four digits of Access Point MAC Address).
- Connect to QN_XX:XX SSID and browse Access Point's default IP "169.254.1.1".

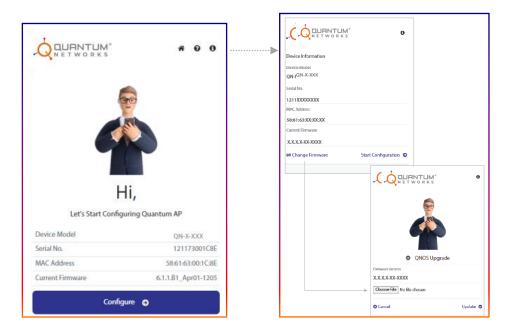



Let's start the configuration.

On the configuration start page, it will display,

- Device model number
- Serial number
- MAC address
- Current firmware

Note:

- Click ¹ button to get the option to "change the firmware" if required.
- Click Change Firmware to update firmware if required. Select the firmware file from the respective location and update it.

Step 3 - Setting up device IP address

Click "**Configure**" and set the device IP address by selecting the required options.

- Connectivity Mode Select the connectivity mode.
- Protocol DHCP, Static or PPPoE
- Interface Select interface
- VLAN Assignment- Enable parameter. Enter VLAN ID and click "Fetch IP Address" to get the respective IP in case of VLAN setup is required.

Oevice IP Address	\rightarrow	Connectivity Mode Ethernet
Connectivity Mode Ethernet	~	Ethernet USB DHCP
Protocol DHCP	~	Protocol V DHCP V
nterface eth0	~	DHCP Static PPPoE
VLAN Assignement 1 Fetch I IP 192.168.7.40	P Address	Interface eth0 eth1 eth2
Subnet 255.255.255.0		eth3
Gateway 192.168.7.1		Note: As per the Access Point specifications -Connectivity Mode, Protocol and Interface options will come.
Primary DNS 192.168.7.4		Select the options as per the requirement.
Secondary DNS 4.2.2.2		

Figure 3

Click "Proceed" to apply configuration and turn to the next page.

Step 4 – Set the management mode

Management Mode

Quantum Networks Access Point can be configured in two modes:

Rudder (on cloud / on-premise)

Centralized management of Access Points using Quantum Rudder **Standalone**

Independent management of each Access Point

Management Settings
Rudder Standalone
Enter Quantum RUDDER Login Credentials
Email Jhon@blick.com
Password 🔹
RUDDER URL / IP Address https://rudder.qntmnet.com
G Back Proceed O

Figure 4

Step 5 - Access Point quick setup in Rudder Mode

• Select "Management Mode" as "Rudder", enter Quantum Rudder login credentials and click "Proceed".

Management Settings Rudder Standalone	
Enter Quantum RUDDER Login Credentials Email Jhon@blick.com	
Password (
RUDDER URL / IP Address https://rudder.qntmnet.com	In the case of on-premise RUDDER, mention the local server IP Address/URL assigned to RUDDER, here.
Figure 5	<u></u>

• It will verify the credentials, and turn to a next page.




Figure 6

- Upgrade QNOS version by either downloading from the cloud or by selecting manually from respective location and upgrade or click "**Skip Upgrade**" to move further.
- The user will turn to a page where the user has to select the site and AP group.

	ТШМ [®] R K S	# O	(î;
0	RUDDER Setup		
Select Site Quantum HO			~
Select AP Group Head office			~
G Back		Proceed	Ð

Figure 7

- Select Rudder site and AP Group where Access Point's needs to be added and click "**Proceed**".
- If the selected site is already having another Access Point, it will automatically configure AP in a bridge mode and will turn the user on the summary page after clicking **"Proceed"**. (Figure 8)
- If this is the first Access Point for the selected site the user will turn on the page, where the user can select Access Point Operation mode as **Bridge** or **Router**. (Figure 9)

	guration Summary
	Device Details
Serial No.	121173001C8E
Model	QN-X-XXX
Management Mode	Cloud
Operation Mode	Bridge
Cloud	Jhon@blick.com
Site	Quantum HO
AP Group	Head office
V	VAN Settings
Protocol	DHCP
IP Address	192.168.7.96
Subnet	255.255.255.0
Gateway	192.168.7.1
Primary DNS	192.168.7.4
Secondary DNS	42.2.2

Figure 8

Figure 9

Bridge

- Select option **Bridge** and click "**Proceed"**. •
- Configure **WLAN** (SSID) parameters and click "**Proceed".** •

Parameter	Value
WLAN Name	Define a name for the network
SSID	Define visible wireless network name
Passphrase	Configure a passphrase for SSID

	NTUM [®] orks	4 6	Ģ
	Configur	ation	
WLAN			
WLAN Name Jhon			
SSID Demo1			
Passphrase			۲
🚱 Back	Skip	Proceed	•

Note: If you do not want to create WLAN (SSID)/LAN now, click the ${\bf Skip}$ option. It will turn to ${\bf Configuration}$ Summary.

* 0 8

Figure 10

Configuration Summary			
	Device Details		
Serial No.	121173001C8E		
Model	QN-X-XXX		
Management Mode	Cloud		
Operation Mode	Bridge		
Cloud	Jhon@blick.com		
Site	Quantum HO		
AP Group	Head office		
	WAN Settings		
Protocol	DHCP		Re
IP Address	192.168.7.96		"R
Subnet	255.255.255.0		
Gateway	192.168.7.1		cli
Primary DNS	192.168.7.4		
Secondary DNS	4.2.2.2		
	WLAN Details		
WLAN	Jhon		
SSID	Demo1		
Radio	2.4 GHz,5 GHz		
Encryption	WPA2		
Algorithm	AES		
Passphrase		۲	

Review the Configuration Summary. Click "Reconfigure" if any changes are required or click "Proceed" to complete the configuration.

Figure 11

Router

- Select option **Router** and click "**Proceed**".
- Configure WLAN (SSID) and Local subnet parameters and click "Proceed".

Parameter	Value
WLAN	
WLAN Name	Define a name for the network
SSID	Define visible wireless network name
Password	Configure passphrase for SSID
Local Subnet	
IP Address	LAN IP address. This IP address can be used for
	accessing this Access Point
Subnet Mask	LAN Subnet mask

٦

		,	
	-		Device Details
•		Serial No.	121173001C8E
🔿 QUANTUM° 🐐 0 📚	•	Model	QN-X-XXX
SSID Demo1	Management Mode	Cloud	
	Model QN-X-XXX Management Mode Cloud Operation Mode Router Cloud Jhon@blick.com Site Quantum HO AP Group Head office WNN Settings Protocol DHCP IP Address 192.168.7.96 Subnet Subnet Protocol DHCP IP Address 192.168.7.96 Subnet 255.255.05 Gateway 192.168.7.1 Primary DNS 192.168.7.1 Primary DNS 192.168.7.1 Primary DNS 192.168.7.1 Primary DNS 192.168.7.1 Primary DNS 192.168.7.4 Secondary DNS 422.2 ICCLI Subnet Name Default IP 192.168.7.60 Subnet 255.255.0 WLAN Details WLAN Details WLAN Jhon SSID Demo1 Radio 2.4 GHz; GHz Encryption WPA2 Algorithm AES Pasphrase	Router	
Secondary D Passphrase Passp	Cloud	Jhon@blick.com	
		Site	Quantum HO
		AP Group	Head office
VV LAIN			WAN Settings
WLAN Name		Protocol	DHCP
		IP Address	192.168.7.96
		Subnet	255.255.255.0
SSID		Gateway	192.168.7.1
	Mode T W O R K S Configuration Cloue Site AP G Proto IP Ad Subn Cates Primu Secon Name Proto PAG Subn Cloue Site AP G Subn Cloue Site AP G Subn S	Primary DNS	192.168.7.4
Configuration VLAN WLAN Name Jhon SSID Demo1 Passphrase Cocal Subnet IP Address 192.168.7.60 Subnet	••••••	Secondary DNS	4.2.2.2
Paernhraea			
		Name	Default
Configuration /LAN /LAN WLAN Name Jhon SSID Demo1 Passphrase Cocal Subnet IP Address 192.168.7.60 Subnet		IP	192.168.7.60
Configuration /LAN WLAN Name Jhon SSID Demo1 Passphrase Cocal Subnet IP Address 192.168.7.60 Subnet		Subnet	255.255.255.0
			WLAN Details
IP Address		WLAN	Jhon
Configuration VLAN WLAN Name Jhon SID Demo1 Passphrase Cocal Subnet IP Address 192.168.7.60 Subnet		SSID	Demo1
		Radio	2.4 GHz,5 GHz
Subnet		Encryption	WPA2
		Algorithm	AES
Configuration Co		Passphrase	

Г

Figure 12

Figure 13

Note: If you do not want to create **WLAN** (SSID)/**LAN** now, click the **Skip** option. It will turn to **Configuration Summary**.

• Review the Configuration Summary. Click "**Reconfigure"** if any changes are required or click "**Proceed"** to complete the configuration.

Step 6 - Access Point quick setup in standalone mode

	#0 ≑
Management S	ettings
Rudder Standalone	
Set AP Login Crede	entials
Username Jhon	
Password	۲
O Back	Proceed O

Figure 14

- Select "Management Mode" as "Standalone" if each Access Point is to be configured and managed individually. Define username and password for the device and click "Proceed".
- User can select Access Point Operation mode as **Bridge** or **Router**.



Figure 15

Bridge

- Select option **Bridge** and click "**Proceed**". •
- Configure **WLAN** (SSID) parameters and click "**Proceed"**. •

Parameter	Value
Country	Select country for radio management.
Timezone	Select timezone for Rudder management.
WLAN Name	Define a name for the network.
SSID	Define visible wireless network name.
Passphrase	Configure a passphrase for SSID.

• Review the Configuration Summary. Click "Reconfigure" if any changes are required or click "**Proceed"** to complete the configuration.

	ñ	0 🗢
Configuration		
General		
Country India		~
Timezone Asia/Kolkata		~
WLAN		
WLAN Name Jhon		
SSID Demo		
Passphrase		۲
G Back	Proce	ed ⊖

ſ		"UM" # 0 rks # 0	¢
	🔳 Conf	guration Summary	
	1	Device Details	
Γ	Serial No.	121173001C8E	
ľ	Management Mode	Standalone	
ľ	Operation Mode	Bridge	
	1	WAN Settings	
Г	Protocol	DHCP	
Г	IP Address	192.168.7.96	
Ľ	Subnet Mask	255.255.255.0	
Į	Gateway	192.168.7.1	
	Primary DNS	192.168.7.4	
ľ	Secondary DNS	4.2.2.2	
П	1	WLAN Details	
Г	WLAN	Jhon	
Г	SSID	Demo	
Г	Radio	2.4 GHz, 5 GHz	
Г	Passphrase		۲
		User Details	
Γ	Username	Jhon	
	Password		۲
	• Reconfigure	Proceed	θ

Figure 16

Figure 17

Router

- Select option **Router** and click "**Proceed"**.
- Configure WLAN (SSID) and Local subnet parameters and click "Proceed".

Parameter	Value
WLAN	
Country	Select country for radio management.
Timezone	Select timezone for Rudder management.
WLAN Name	Define a name for the network.
SSID	Define visible wireless network name.
Password	Configure a passphrase for SSID.
Local Subnet	
IP Address	LAN IP address. This IP address can be used for
	accessing this Access Point.
Subnet Mask	LAN subnet mask.

• Review the Configuration Summary. Click "**Reconfigure"** if any changes are required or click "**Proceed"** to complete the configuration.

	ñ	0	Ģ	
Configuration				
General				
Country India			~	
Timezone Asia/Kolkata			~	
WLAN				
WLAN Name Jhon				
SSID Demo				
Passphrase			۲	
Local Subnet				
IP Address 192.168.1.1				
Subnet Mask 255.255.255.0				
🕒 Back	Proc	eed	0	

	TUM [°] # O drks	Ģ
🔳 Con	figuration Summary	
	Device Details	
Serial No.	121173001C8E	
Management Mode	Standalone	
Operation Mode	Router	
	WAN Settings	
Protocol	DHCP	
IP Address	192.168.7.96	
Subnet Mask	255.255.255.0	
Gateway	192.168.7.1	
Primary DNS	192.168.7.4	
Secondary DNS	4.2.2.2	
	Local Subnet	
Name	LAN	
IP	192.168.1.1	
Subnet	255.255.255.0	
	WLAN Details	
WLAN	Jhon	
SSID	Demo	
Radio	2.4 GHz, 5 GHz	
Passphrase		0
	User Details	
Username	Jhon	
Password	*****	4
• Reconfigure	Proceed	Ð

Figure 18

Figure 19

Reset Access Point to factory defaults

- Power on the Access Point
- Push the reset button on the back panel and hold it for 10 seconds.
- o Access Point would restart with factory defaults

Access Point default login detail

With standalone mode:

User Name: Created while doing "Quick Setup"

Password: Created while doing "Quick Setup"

With Rudder mode:

User Name: Auto Generated, administrator can change from site settings.

Password: Auto Generated, administrator can change from site settings.

If you encounter problems while installing or using this product, please browse www.qntmnet.com for:

- Direct contact with the support center.
 - o Contact: 18001231163
 - Email: support@qntmnet.com
- For the latest software, user documentation and product updates browse: qntmnet.com/resource-library